



FTC880

Next-generation 4G LTE Cat 1 battery-mounted vehicle GPS tracker with enhanced GNSS accuracy and IP69K resistance



Fleet telematics



Car sharing, rental & leasing



Driver safety

FT PLATFORM

Fleet Telematics (FT) platform offers advanced firmware and hardware, taking your tracking experience to the next level

HIGHER GNSS ACCURACY

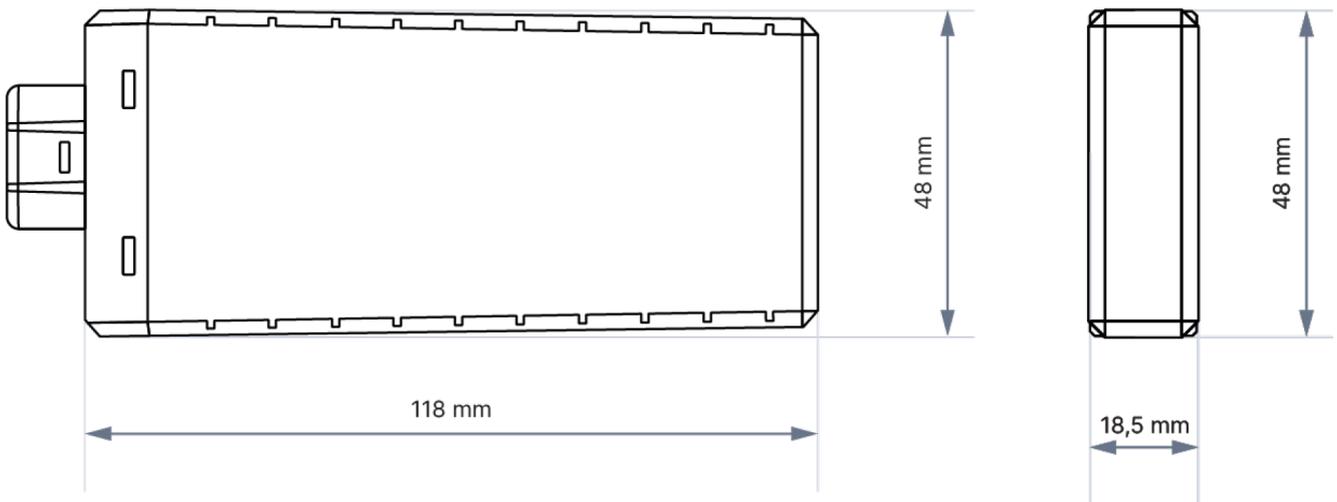
More precise GNSS with up to 41 visible satellites, enabling considerably higher tracking quality for location-based services

IP69K WATERPROOF CASING

The ultimate protection against dust, high pressure water, and steam

LONGER PERFORMANCE, SLOWER DRAINAGE

Optimised sleep modes allow the device to operate on its own for an extended period of time and significantly reduce vehicle battery drainage


Product

Model name **FTC880-QJAB0**

Module

Model name **FTC880-QJAB0**: Quectel EG915U-EU with AG3335

Technology LTE CAT 1/GSM/GPRS/GNSS

GNSS

GNSS GPS, GLONASS, GALILEO, BEIDOU

Receiver L1: 75 channel

Tracking sensitivity -165 dBm

Position Accuracy < 1.5 m CEP

Velocity Accuracy < 0.1 m/s (within +/- 15% error)

Hot start < 1 s

Warm start < 25 s

Cold start < 35 s

Cellular

Technology	LTE CAT 1/GSM
2G bands	FTC880-QJAB0 : GSM: B2/B3/B5/B8
4G LTE bands	FTC880-QJAB0 : LTE FDD (CAT 1): B1/B3/B5/B7/B8/B20/B28
Data transfer	LTE FDD (CAT 1): Max. 10 Mbps (DL) / Max. 5 Mbps (UL) GSM (GPRS): Max. 85.6 Kbps (DL) / Max. 85.6 Kbps (UL)
Transmit power	Class 5 for GSM850/900: 30±5dBm Class 3 for GSM1800/1900: 29±5dBm Class 3 for LTE-FDD: 26±5dBm
Data support	SMS (TEXT, PDU), Network protocols (TCP, UDP)

Data codec

Codec support	Codec 8 Extended
---------------	------------------

Power

Input voltage range	10-30 V DC
Internal Back-up battery	320 mAh Li-Ion battery 3.7V (1.18 Wh)
Internal fuse	3 A
Power consumption	At 12V < 22.729mA Normal mode At 12V < 5.314mA Online Deep Sleep mode At 12V < 2.510mA Deep Sleep mode At 12V < 0.601mA Power off Sleep

Physical specification

Dimensions	118 x 48 x 18.5 mm (L x W x H)
Weight	118 g

Operating environment

Operating temperature (without battery)	-30 °C to +85 °C
Storage temperature (without battery)	-30 °C to +85 °C
Operating temperature (with battery)	0 °C to +45 °C
Storage temperature (with battery)	-20 °C to +45 °C for 1 month -20 °C to +35 °C for 6 months
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP69K
Battery charge temperature	0 °C to +45 °C
Battery discharge temperature	-20 °C to +60 °C
Battery storage temperature	-10 °C to +50 °C for 1 month -10 °C to +35 °C for 3 months 0 °C to +30 °C for 1 year

Interface

Connection	U-Type cable
GNSS antenna	Internal High Gain
Cellular antenna	Internal High Gain
USB	2.0 USB Type-C
LED indication	2 status LED lights
SIM	Nano-SIM
Memory	128MB internal flash memory

Features

Sensors	Accelerometer
Scenarios	Green Driving, Over Speeding detection, Jamming detection, Excessive idling detection, Unplug detection, Crash Detection, Auto Geofence, Trip
Sleep modes	Deep Sleep, Online Deep Sleep, Power Off Sleep
Configuration and firmware update	FOTA WEB, Teltonika Configuration Tool (TCT)
SMS	Configuration, Debug
GPRS commands	Configuration, Debug
Time Synchronization	GNSS, NITZ, NTP
Ignition detection	Accelerometer, External Power Voltage

Certification & approvals

Regulatory	CE/RED, E-Mark, RCM, UK CA
------------	----------------------------