
LX19-6U-350Gx

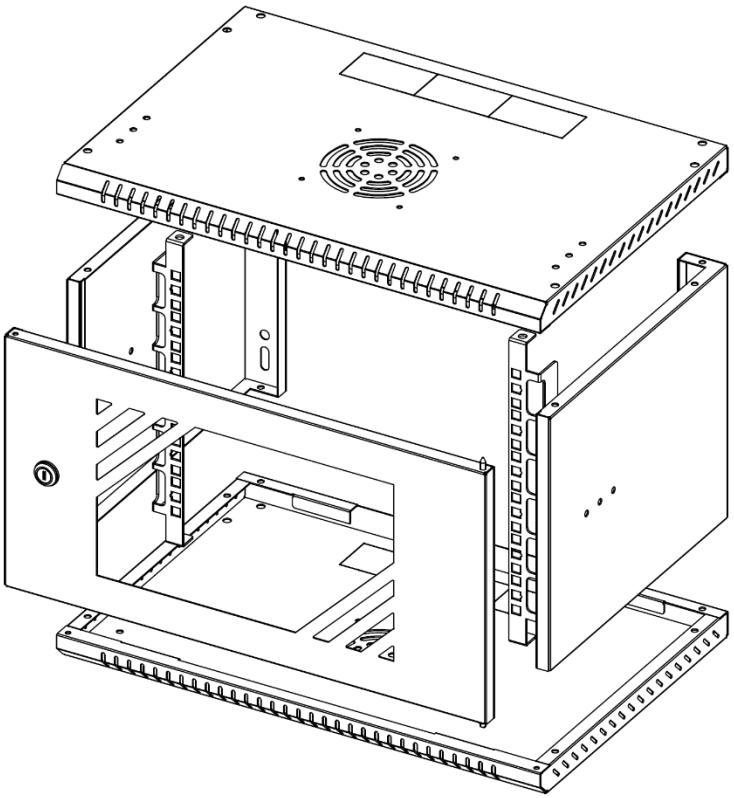

WALL CABINET

Material	SPCC Thickness 1.2mm；Tempered glass Thickness:4mm
Degree of protection	IP20 with back panel
Surface finish	Degreasing, Pickling, Phosphating, Powder Coated
Specification	6U (329mm)
Width	520mm
Depth	350mm
Color	RAL9004; RAL7035 as optional

- Single section unassembled structure, compatible with 19" standard equipment;
- 4mm tempered glass front door with over 180 turning degree; Cable entry on the top and bottom
- L-shaped mounting profile, easy to adjustable on the side panel
- Fan cutout on the top, easy to install fan;
- Back with four mounting holes, easy to fix on the wall;
- Various accessories for option shelf, patch panel;

• Flat packing, save the container space, easy to transport;

Expanded view:

