

**DS-PWA64-M-WE**  
**DS-PWA64-M-WE(O-STD)**

- TCP/IP, Wi-Fi, and 4G network
- New generation wireless protocol: Tri-X/Cam-X
- Long RF transmission distance
- Two-way communication with AES-128 encryption
- Connects up to 64 wireless zones/outputs (including 48 PIRCAMs), 32 wireless keyfobs, 2 repeaters, 4 sounders (2 internal+2 external), 8 tag readers and keypads.
- Supports up to 32 network users, including 1 installer, 1 administrator, and 30 normal users
- Voice prompt
- Configuration via Web client, mobile client, and Convergence Cloud
- Hik-Connect and Hik-ProConnect configuration depends on the user access level
- Pushes alarm notification via messages or phone calls
- Views live videos from Hik-Connect
- Alarm video clips via emails and APP
- Supports LED indicator to indicate system status
- 4950 mAh lithium backup battery
- SIA-DC09 protocol, and supports both Contact ID and SIA data format
- Supports Hik-IP Receiver and Hik-IP Receiver Pro for ARC communication

## ▪ Specification

<b>Software features</b>	
Diagnostics via the APP or Web	Supported
Installer	1
Installer APP for programming	Supported
Web server for maintenance (offline configuration)	Supported
Wi-Fi standard	Supported
Arm modes	Away/Stay
Firmware upgrade	APP/Web Portal
Admin	1
Programming tools	Hik-Connect/Hik-ProConnect/Web Portal/IVMS4200/ Convergence Cloud
Forced arming with open zones	Supported
Memory log stored	5000
User	30
User APP for operating	Supported
Voice prompt	Supported
Area	16
Automatic arm/disarm timers	Supported
<b>Hardware features</b>	
SIM slot	Dual
GPRS on board	Supported
<b>Electrical characteristics</b>	
Battery type	Built in on board Battery Li
Power supply	Built in power supply
Operation temperature	-10 °C to +55 °C (please make sure the adapter is connected)
Battery lifespan	Up to 12 hours at normal temperature (The battery working time can be significantly reduced at low temperatures)
<b>Wireless transmission</b>	
RF frequency	868 Mhz
Wireless security	Frequency Hoping 128 AES Encryption
<b>General</b>	
Dimension(WxHxD)	170.0 mm (6.7") × 170.0 (6.7") mm × 38.6 mm (1.5")
Shell material	Plastic
Color	White
Weight	557.5 g (19.7 oz)
<b>Device management</b>	
Tag	32
PIR cam	Supported
Keypad	8 (including tag reader)
Wireless sounder	4
Wireless repeater	2
Keyfob	32


**Report method**

ARC protocol	SIA DC09 (SIA level 2, Contact ID), ISUP, OTAP Hik-IP Receiver & Hik-IP Receiver Pro (Sur-Gard & Ademco 685) Supports video verification and remote control
--------------	---

▪ **Available Model**

DS-PWA64-M-WE

▪ **Dimension**

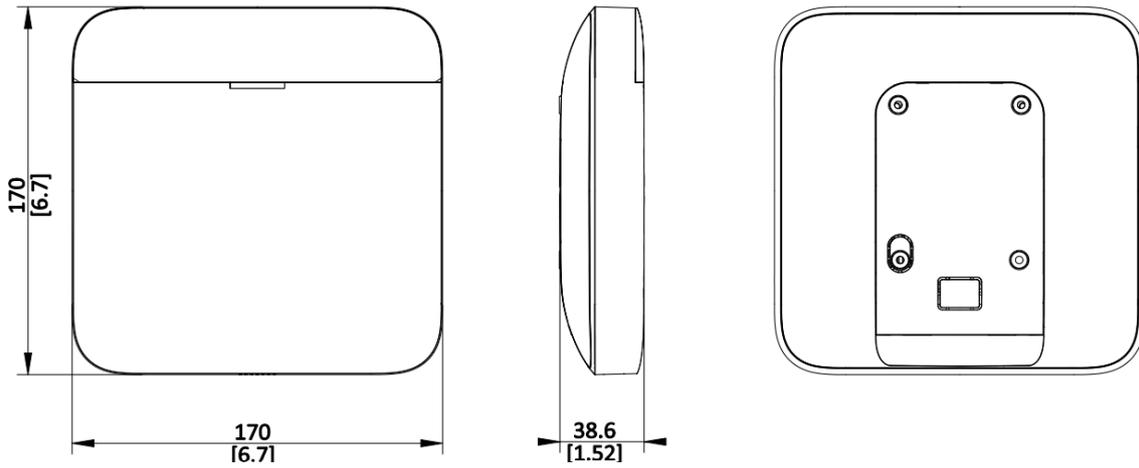

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

