


## DS-2CD2D14WD


### 1.0 MP WDR Pinhole Network Camera

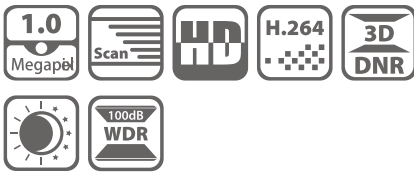

#### Key Features

- Up to 1 Megapixel (1280 x 720) Resolution
- HD720p Real-Time Video
- 100 dB WDR
- 3D DNR

#### Dimensions

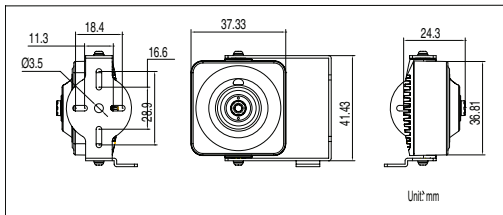

#### Order Models

DS-2CD2D14WD

DS-2CD2D14WD	
Camera	
Image Sensor	1/4" progressive scan CMOS
Minimum Illumination	0.028 lux @ f/2.0
Shutter Time	1/3 sec. to 1/100,000 sec.
Lens	2.8 mm @ f/2.0, 67.3°
Day/Night	IR cut filter
Digital Noise Reduction	3D DNR
Wide Dynamic Range	100 dB
Compression Standard	
Video Compression	H.264/MJPEG
H.264 Codec Profile	Baseline profile/main profile
Video Bit Rate	32 Kbps to 8 Mbps
Image	
Maximum Image Resolution	1280 x 720
Frame Rate	60 Hz: 30 fps (1280 x 720), 30 fps (704 x 576), 30 fps (640 x 480)
Image Settings	Saturation, brightness, contrast adjustable through client software or Web browser
Network	
Network Storage	NAS
Alarm Triggers	Intrusion, line crossing, motion detection, dynamic analysis, tampering alarm
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
System Compatibility	ONVIF, PSIA, CGI, ISAPI
General Functionalities	Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark
Interface	
Communication Interface	1 RJ-45 10 M/100 M Ethernet port
General	
Operating Conditions	-30° C to 60° C (-22° F to 140° F), humidity 95% or less (non-condensing)
Power Supply	12 VDC ±10%
Power Consumption	Maximum 3 W
Dimensions	37.3 mm × 41.4 mm × 24.3 mm (1.47" × 1.63" × .96")
Weight	55 g (1.94 ozs)