

# DS-K1T804AMF Fingerprint Access Control Terminal



- Integrated management of access control and the attendance
- 2.4-inch LCD screen to display the time, the date and swiping/fingerprint authentication results
- Transmission modes of wired network (TCP/IP) and wireless network
- Max. 3000 users, Max. 3000 fingerprints, Max. 100,000 event records
- Different authentication types can be configured according to different situations, authentication via PIN code is also supported
- Stand-alone operation: locally adds person, card and fingerprints information
- Exports the presenting card data and the attendance report to the USB flash drive
- Up to 32 normal shifts, up to 32 man-hour shifts, and up to 32 attendance holiday schedules can be configured
- Generates the attendance report automatically
- Mifare card reading, including card No. reading
- Secure door control unit accessing via RS-485 connection
- Supports fingerprint card reader (DS-K1201 series) accessing
- Tampering detection, unlocking overtime alarm, invalid card swiping over times alarm, duress card alarm, and so on
- Supports multiple languages: English, Vietnamese, Brazilian Portuguese, Spanish, French, Italian, Arabic, Thai, Turkish,
   Indonesian, and Ukrainian
- Accurate data and time display provided by built-in electronic clock
- Check the device running status via the Watchdog. When exception status occurs, the system will reboot automatically
- Data can be permanently saved after power-off
- Supports transmitting data via Wi-Fi
- Operates via Hik-Connect mobile client
- Supports ISAPI protocol and ISUP 5.0 protocol






## Specification

| - Specification                            |  |
|--|--|
| System                                     |  |
| Operation system                           | Linux  |
| Screen                                     |  |
| Size                                       | 2.4-inch   |
| Resolution                                 | 320 × 240  |
| Type                                       | LCD-TFT display screen   |
| Audio                                      |  |
| Audio output                               | 1 loudspeaker, 1 buzzer  |
| Network                                    |  |
| Wired network                              | TCP/IP, 10/100Mbps, self-adaptive                                      |
| Wi-Fi                                      | Support  |
| Interface                                  |  |
| Network interface                          | 1  |
| RS-485                                     | 1  |
| Wiegand                                    | 1  |
| Lock output                                | 1  |
| Exit button                                | 1  |
| Door contact input                         | 1  |
| IO input                                   | 1  |
| IO output                                  | 1  |
| TAMPER                                     | 1  |
| USB  | 1  |
| Capacity                                   |  |
| Card capacity                              | 3000   |
| Fingerprint capacity                       | 3000   |
| Event capacity                             | 100,000  |
| Authentication                             |  |
| Card type                                  | Mifare 1 card  |
| Card reading distance                      | 0 to 4.5 cm  |
| Card reading duration                      | < 1s   |
| Fingerprint module                         | Optical fingerprint module   |
| Fingerprint comparing mode                 | 1:1 and 1:N  |
| Fingerprint recognition duration           | < 1s   |
| Fingerprint False Acceptance<br>Rate (FAR) | ≤ 0.001 %  |
| Fingerprint False Rejection Rate (FRR)     | ≤ 0.01 %   |
| Others                                     |  |
| Indicator                                  | Power/status (red/green)   |
| Power supply                               | 12 VDC/1 A   |
| Working temperature                        | -10 °C to +55 °C (14 °F to +131 °F)                                    |
| Working humidity                           | 10% to 90% (no condensing)   |
| Color                                      | Black (included), gold (optional), silver (optional), white (optional) |
| Dimensions                                 | 205 mm × 76.5 mm × 37 mm (8.07" × 3.01" × 1.46")                       |
| Installation                               | Surface mounting   |

## Dimension



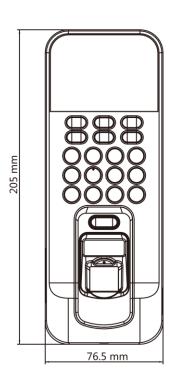



### Available Model

DS-K1T804AMF

Distributed by

.

## **HIKVISION**°

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T+39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 [10] 0351172 sale.africa@hikvision.com

Hikvision France T +33[0]1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T+7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com