

## **DS-KAB673-WBQR Peripheral Module**



- Supports call function
- Supports controlling door by keyfob
- Applicable with DS-K1T673 series.


## ▪ Specification

| General             |                                                                                                           |
|---------------------|-----------------------------------------------------------------------------------------------------------|
| Working temperature | -30 °C to 60 °C (-22 °C to 140 °F)                                                                        |
| Dimensions          | 110.5 mm × 23.7 mm × 48.1 mm (4.35" × 0.93" × 1.89")                                                      |
| Working humidity    | 0 to 90% (no condensing)                                                                                  |
| Function            |                                                                                                           |
| Barcode recognition | Support<br>Format: Code 128, Interleaved 2 of 5, Matrix 2 of 5 , Code 39, Codebar, Code 9 and UCC/EAN-128 |
| QR code recognition | Support                                                                                                   |

## ▪ Available Model

DS-KAB673-WBQR

## ▪ Dimension

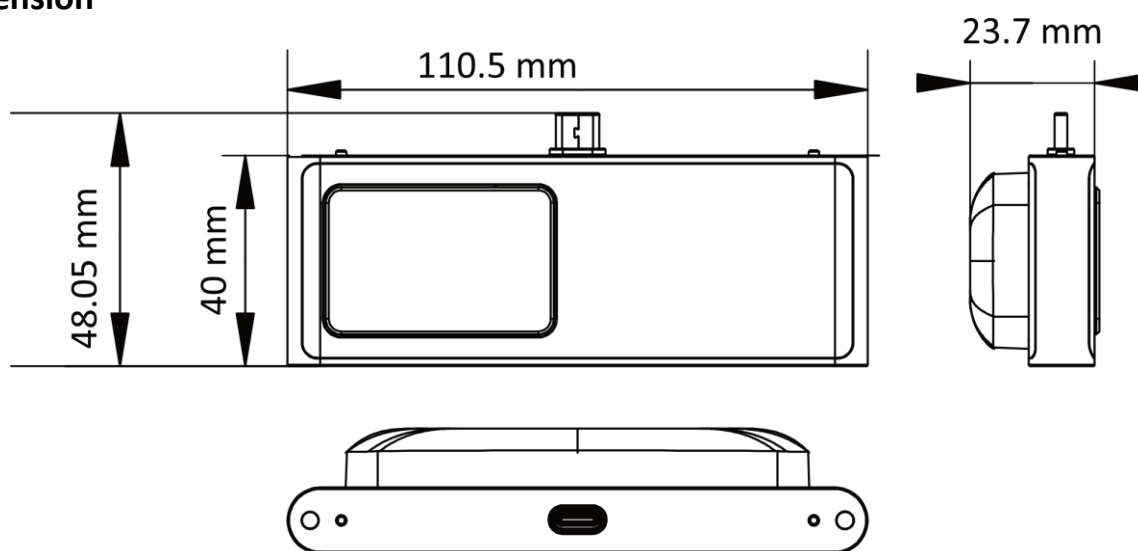

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq