

## DS-K1105EDB Pro Card Reader



- Supports RS-485 protocol, Wiegand (W26/W34) protocol, and OSDP protocol
- Build-in M1 and EM card reading module (Frequency: 13.56 MHz&125 KHz)
- Supports Desfire card reading
- Built-in buzzer for identifying the reading status
- Supports online upgrade
- Supports multiple authentication methods such as card swiping, bluetooth, etc
- Supports touch panel for operation
- Supports occlusion detection, with bluetooth, it can realize door open via waving hands

**▪ Specification**


<b>Interface</b>	
RS-485	1 RS-485. Supports OSDP protocol, Baud 19200
Wiegand	Support
<b>Authentication</b>	
Card type	EM card,M1 card,DESfire card
<b>General</b>	
Power supply	DC 12V
Power consumption	≤6W
Working temperature	-40 ~65°C
Working humidity	0%--90%
Protective level	IP66
Dimensions	139×46×21.2mm ( 5.47×1.81×0.83inch )
Installation	Wall mounting
Weight	167.7g
Buzzer	Support

**▪ Available Model**

DS-K1105EDB(STD)

DS-K1105EDB(NEU)

**▪ Dimension**

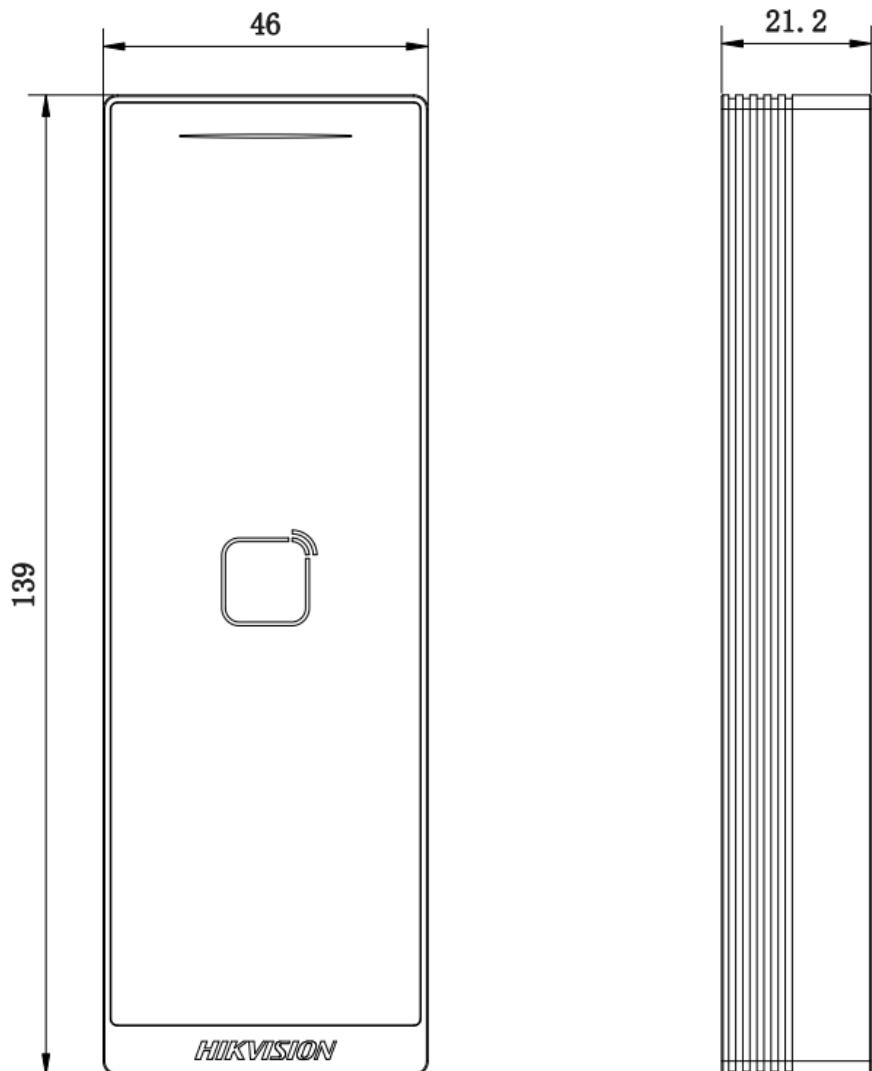

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION®**