

## DS-QAE0420G1-V Analog Column Speaker



- The speaker unit adopts aerospace magnetic, imported adhesive coating, and lightweight sound film design, with high sensitivity, bright sound, and long transmission distance
- Adopt professional engineering reinforced plastics with high strength
- By using L-brackets, the installation surface angle can be adjusted for convenient installation
- Professional integrated design, supporting IP66 waterproof, with a simple and beautiful appearance

## ▪ Specification




Speaker	
Impedance	8 Ω
Rated Power	20 W
Sensitivity(1 m, 1 W)	89.5 dB ± 3 dB
Max. Acoustic Pressure	96 dBSPL
Frequency Response	100 Hz to 20 kHz
Speaker Unit	Full frequency 4" × 1 , high frequency 0.75" × 1
Interface	
Audio In	Green end (terminal block), constant voltage input: 100 V, COM
Approval	
Protection	IP66
General	
Color	White
Material	Front cover: steel mesh, back cover: plastic
Dimension	280 mm × 161.9 mm × 119.8 mm (11.02" × 6.37" × 4.72")
Weight	Approx. 1862.4 g (4.11 lb.)
Package Dimension	340 mm × 306 mm × 175 mm (13.39" × 12.05" × 6.89")
With Package Weight	2610.2 g (5.75 lb.)
Packing List	Device × 1 Screw pack × 1 L-Bracket × 2 Regulatory Compliance and Safety Information × 1
Operating Temperature	-25 °C to 55 °C(-13 °F to 131 °F)
Operating Humidity	< 90% (No condensation)

*\*The device should be used together with amplifier.*

## ▪ Available Model

DS-QAE0420G1-V

## ▪ Dimension

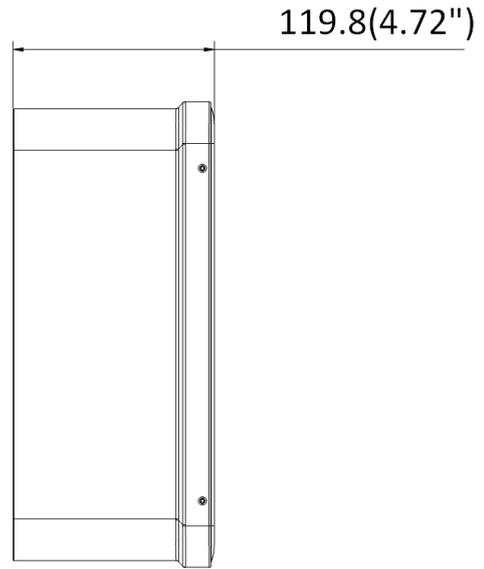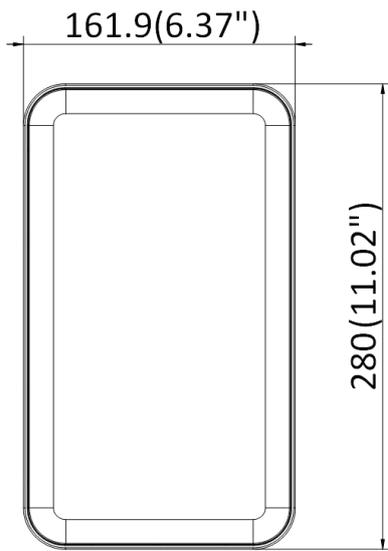

Unit: mm (inch)

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

