



DS-2CS58C2P(N)-ITS

720 TVL IR Mobile Dome CVBS Camera

Key Features:

- 0.1Lux @(F1.2,AGC ON),0 Lux with IR
- Adopt wide-angle lens with wider monitoring coverage
- Support electronic shutter and AGC
- Patented universal regulating mechanism, easy to adjust
- Anti-vibration design and aviation port for mobile environments
- Built-in microphone
- IP65


Application:

Suitable for mobile environments.

Order Model:

DS-2CS58C2P(N)-ITS

Dimensions:

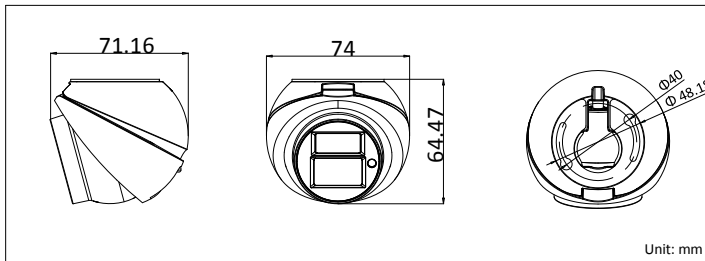

Specification:

Model	DS-2CS58C2P(N)-ITS
Parameter	720TVL IR Mobile Dome Camera
Camera	
Image Sensor	1.0Mega Progressive Scan CMOS
Signal System	PAL/NTSC
Resolution	1280(H)×800(V)
Min. Illumination	0.1Lux @(F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(30)s to 1/50,000s
Lens	2.1mm (2.8mm、3.6mm optional)
Lens Mount	M12
Angle Adjustment	Pan:0° - 50°; Tilt:0° - 50°; Rotation:0° - 360°
Day & Night	Electronic
Horizontal Definition	720TVL
Synchronization	Internal
Video Output	Aviation port
Audio Input	Built-in Mic
Audio Output	1-ch audio interface(Aviation plug)
S/N Ratio	> 62dB
General	
Working Temperature/Humidity	-40℃~75℃, Humidity 90% or less (non-condensing)
Power Supply	DC6V-16V
Power Consumption	3.5W MAX
IR Range	20-30m
Ingress Protection	IP65
Dimension(mm)	74×64.47×71.16
Weight	400g