

NUUO NVRmini 2 SECURE • SIMPLE • SMART





Linux Embedded NAS NVR Solution

Direct POS Metadata Support

Easy Network Configuration

Hot Swappable SMB Solution

The Secure NVR Choice

NUUO NVRmini 2 is the lightweight, portable NVR solution with NAS functionality. Setup is simple and easy, with automatic port forwarding settings built in. NUUO NVRmini 2 supports POS integration, making this the perfect solution for small retail chain stores. NUUO NVRmini 2 also comes full equipped as a NAS, so you can enjoy the full storage benefits like easy hard drive hot-swapping and RAID functions for data protection. Choose NVR and know that your valuable video data is safe, always.



Feature Highlights

- Supports camera multi-stream for remote live view bandwidth control
- Support mobile client for iPhone / iPad / Andriod
- Supports camera multi-stream setting
- Supports camera snapshot
- Supports camera two-way audio
- Supports hard disk S.M.A.R.T test
- Panorama 360° PTZ (ImmerVision and VIVOTEK fisheye)
- Generic dewarp (fisheye)
- Web-based configuration, live viewer, playback
- Online GUI recording schedule
- Digital PTZ and multi-view
- Real-time digital output, email alert and push notification on mobile
- Up to 128 CH remote live view with multiple monitors
- Playback with 5 types of intelligent event search
- Point of Sale (POS)
- E-map with indicator
- Auto port-forwarding

NUUO[®]

NTP server synchronization

*1. Minimum server FW v2.0.0 (with DP upgrade)

Hot Swappable **SMB** Solution



Security Redefined

POS Support

NUUO NVRmini2 is perfect for the installation with limited spaces for server, can replace the faulty hard drives without significant interruption to the system for continuous recording and not missing any important footage. With RAID 0, 1, 5, 10 support, NUUO NVRmini2 easily raise up the security level for SMB solution.

If you have an UPnP enabled router, configuring port forwarding requires zero effort on your part. NUUO NVRmini 2 will automatically configure port forwarding on your router for easy remote viewing and playback. No more fussing over router settings!

Enjoy direct POS transaction text overlay on

both live view and playback mode. Advanced

search of any text in the metadata is available.

Easy Network

Configuration

All transaction metadata is stored in SQLite

format for easy business analysis.

NUUO NVRmini 2 Guards Food Court Transaction

One of NUUO NVRmini 2's strength is POS text overlay on videos that allows for quick search of corresponding transactions. This feature is great for retail businesses to keep their profit shrinkage down and thus raise their profit income. Our client in Taiwan successfully adopted NUUO NVRmini 2 into their food court business with over 100 channels of video cameras to ensure the integrity of each transaction. Choose NUUO NVRmini 2 and start maximizing your profit potentials today!














Client Case Study

Specification

| Product Image | The second se | | | |
|----------------------------------|---|---------|--------------------------|---------|
| Туре | 2-bay Tower | | 4-bay Tower | |
| Model Name | NE-2020 | NE-2040 | NE-4080 | NE-4160 |
| Maximum Number of Licenses | 4 | 4 | 16 | 16 |
| Base License | 2 | 4 | 8 | 16 |
| Recording Performance | 40 Mbps | | 80 Mbps | |
| Operating System | Embedded Linux | | | |
| Compression | H.264, MPEG4, MJPEG, MxPEG (depends on IP camera) | | | |
| Remote Client | Remote Live Viewer (Software), Remote Live Viewer (Web), iViewer (Mobile App) | | | |
| Remote Client OS | Windows XP (32-bit), Win7 (32 and 64-bit), win8 (32 and 64-bit) | | | |
| Mobile Client Platform | iPhone, iPad, Android | | | |
| HDD Bays | 2 | | 4 | |
| RAID Level | 0,1 | | 0,1,5,10 | |
| External Storage | N/A | | DAS | |
| Ethernet Port | 1 x Gigabit Port, RJ-45 | | 2 x Gigabit Port, RJ-45 | |
| External Ports | 2 x USB 2.0 | | 2 x USB 2.0, 1 x eSATA | |
| Audio | Two- way | | | |
| Voltage | 100-240V | | | |
| Power Consumption | 40W | | 90W | |
| Dimensions (H x W x D) | 140.0 x 109.8 x 219.0 mm | | 140.0 x 183.4 x 219.0 mm | |
| Weight (without HDD) | 2.12 kg (4.67lbs) | | 2.97 kg (6.55lbs) | |
| Temperature (Operating with HDD) | 0° C ~ 40°C (32°F ~ 104°F) | | | |
| Humidity (Operating) | 5% ~ 95% | | | |
| Supported Languages | Chinese (Simplified), Chinese (Traditional), Croatian, Czech, Dutch, English, Finnish, French, German, Hebrew, Hungarian, Italian, Japanese, Korean, Polish, Portuguese (Brazil), Russian, Serbian, Spanish, Swedish, Thai, Turkis | | | |

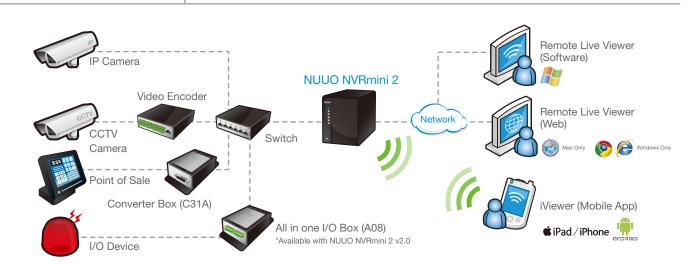

About NUUO

Founded in 2004, NUUO Inc. is one of the leading global surveillance solution providers known for its reliability, prompt service and innovative spirit. NUUO's VMS and NVR solutions offer comprehensive recording, monitoring, and seamless 3rd party solution integration for IP and analog cameras.



NUUO Inc. | B1, No.207-1, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan Tel: +886.2.7739.2260 Fax: +886.2.7703.3377 NUUO US Inc. | 690 N. Berry Street, Suite B, Brea, California 92821, USA Tel: +1.714.990.1688 Fax: +1.714.990.1689 Toll Free: +1.877.241.7035 NUUO African Representative | Fancourt Office Park, Building 7, 1st Floor Right, Cnr Felstead & Northumberland, Northriding, 2169, South Africa Tel: +27.11.704.6845 www.nuuo.com sales@nuuo.com Made in Taiwan V.2015 / 03